




Coaxial Cable

- Suitable for Digital HDTV Applications, CATV and Digital Satellite Installations
- Excellent cable for use with security cameras requiring external power

P/N	Type	Conductor	Shield	Jacket	
3101-01001	RG-6/U Quad	1/1.0mm	Tape: Al Foil Braiding: 0.12mm AL wire 60%	Material: PVC Thickness: 0.8mm O.D.: 7.4±0.2mm Color: Black	
3101-01014	RG-6/U	1/1.0mm	Tape: Al Foil Braiding: 0.12mm AL wire 90%	Material: PVC Thickness: 0.9mm O.D.: 7.0±0.2mm Color: Black	
3105-01002	RG-59/U	1/0.65mm	Tape: Al Foil Braiding: 0.12mm AL wire 80%	Material: PVC Thickness: 0.8mm O.D.: 6.0±0.2mm Color: Black	
3105-01008	RG-59/U + 18AWG*2C	1/0.65mm + 30/0.18mm	Tape: Al Foil Braiding: 0.12mm AL wire 80%	Material: PVC Thickness: 0.9mm O.D.: 6.2±0.2mm Color: Black	
3105-01009	RG-59/U + 18AWG*2C + 1.6Y	1/0.65mm + 30/0.18mm + 1/1.6mm	Tape: Al Foil Braiding: 0.12mm AL wire 80%	Material: PVC Thickness: 0.9mm O.D.: 6.2±0.2mm Color: Black	

Coaxial Compression Connectors

Coax Compression Connectors are manufactured to meet the demands of the satellite and cable TV industry. All series of connectors are permanently connected when terminated with DINTEK Compression Tool.

Features:

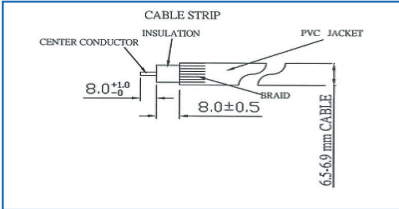
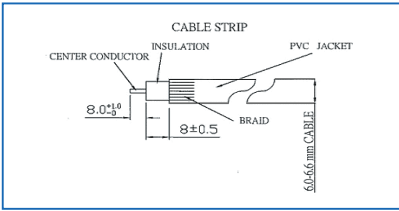
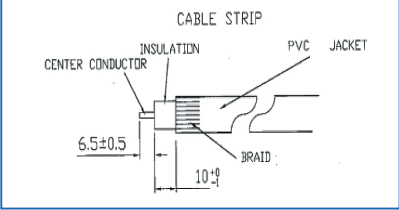
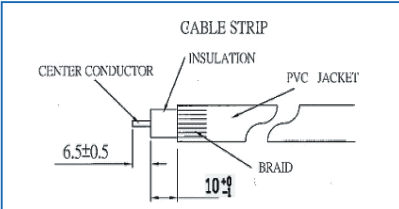
- Connectors to fit RG-59& RG-6
- Weatherproof for indoor/outdoor

Applications:

- CATV,
- CCTV,
- Security systems.

Specifications:

- Bandwidth: 0 MHz - 3 GHz
- Impedance: 75 Ohms (nominal)
- Return Loss: Minimum -30 dB @ 3 GHz
- Tightening Torque: 30 in-lbs.
- Operating Temperature Range: -40°F to +140°F
- Cable Range: 60% through Quad Shield, PE and PVC jackets
- Cable Retention: 40 lbs. minimum

P/N	Description	Std Pkg Qty
3203-01011	BNC Compression Connector for RG6U. 	100
3203-01010	BNC Compression Connector for RG59U. 	100
3211-07002	F Compression Connector for RG6U. 	100
3211-07001	F Compression Connector for RG59U. 	100

Coaxial Compression Tools

P/N	Description	Std Pkg Qty	
6101-03006	<p>Coax Cable Stripper</p> <ul style="list-style-type: none"> → Strip cartridges for RG59/6 cables, → Rotates easily around finger → No blade depth adjustments 	1	 
6102-02005	<p>Compression Tool</p> <ul style="list-style-type: none"> → Crimping F Compression Connectors For RG59, RG6 → Length: 5.6" (143±1mm) → Weight: 280g 	1	  
6102-02006	<p>Compression Tool</p> <ul style="list-style-type: none"> → Crimping F, BNC, & RCA Compression Connectors For RG59, RG6 → Length: 5.98" (152±3mm) → Weight: 295g 	1	  
6104-03002	<p>Coax Cable Cutter</p> <ul style="list-style-type: none"> → Cutting cable RG58/59/6/7/11 cables, Steel reinforced center conductor can be trimmed. → Length: 6.3" (162mm) → Weight: 190g 	1	

